

DC10A

Remote digital display

IP65 enclosure, 9-24 VAC/DC power supply.

The DC10A display allows to display measured values of DC24 controllers.

The display can be connected in two configurations:

1. By connecting the display to the communication bus between the central unit and the controllers of the system, you can display the desired values of any Digitel NEWEL3 controller connected to the same bus.
2. By connecting the display to the local communication bus, the display can show the values of the controller (DC24D/DE) to which it is connected.


The DC10A display can be mounted in the front panel of a cabinet or integrated in a display case.



APPLICATIONS

Compressors, condensers	yes
Hygrometry	yes
Programmable inputs / outputs	yes
Gas concentration	yes
Air conditioning - cooling/heating	yes

DIMENSIONS

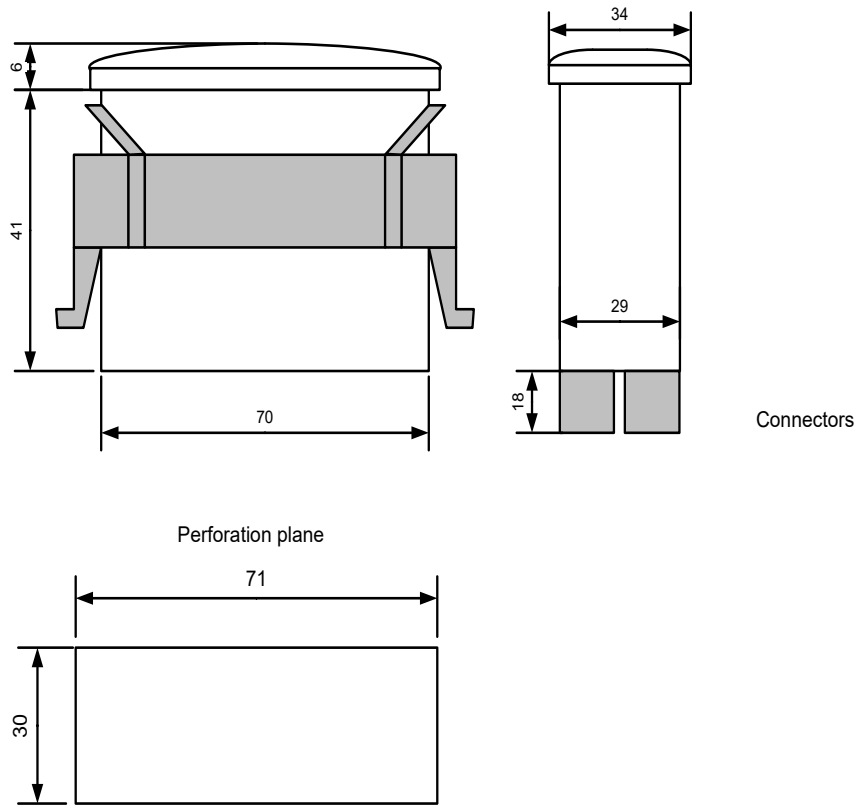

FEATURES

White display	yes
Power supply	9-24 VAC/DC
Remote monitoring bus interface	yes

TECHNICAL DATA

Power supply

Supply voltage 9-24 VAC/DC

Maximum input power 2 W

Protection rating 1

Contamination rating 2

Overvoltage category II

Conditions of use


Temperature 0-40° C

Humidity IP65 enclosure - 0-80 % (without condensation)

ASSEMBLY DIAGRAMS


Local display

The display can show the values of the controller to which it is connected (DC24D/DC24DE) via the local bus.

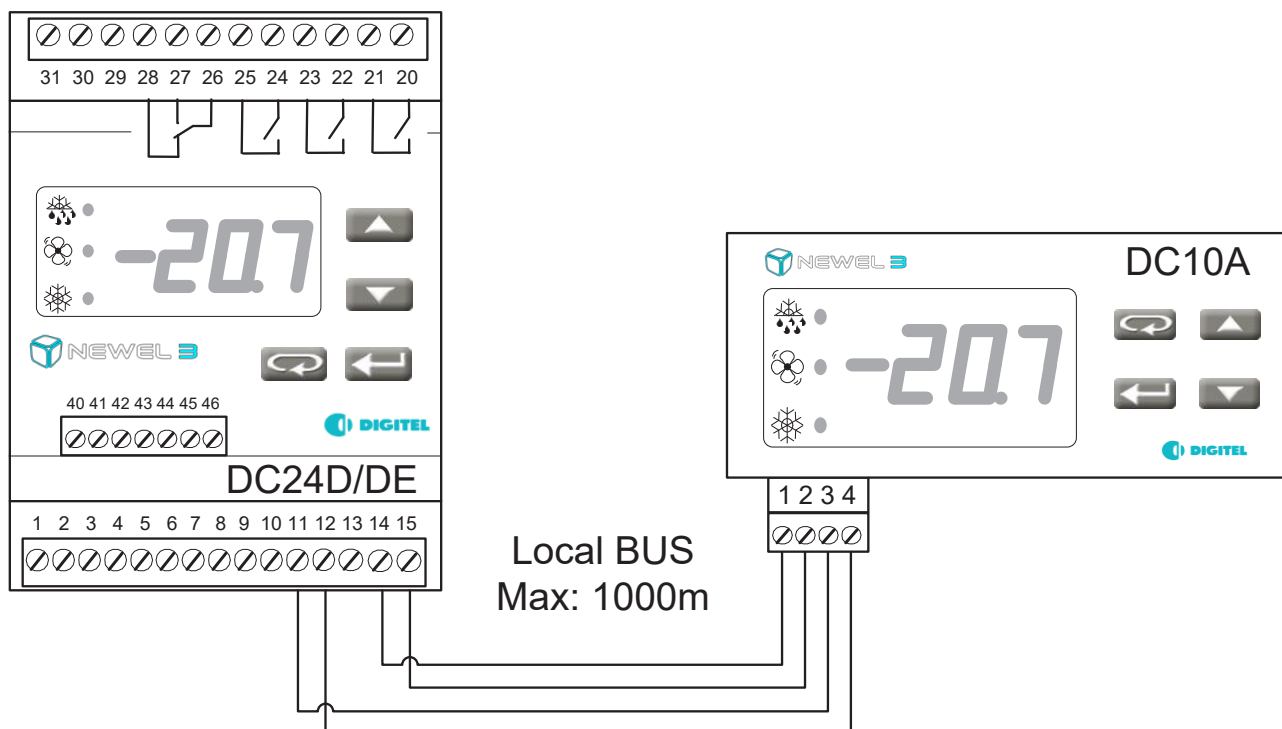

Bus connection

By connecting the display to the communication bus (1 + 2), the display can show the desired values of any controller connected to the same bus.

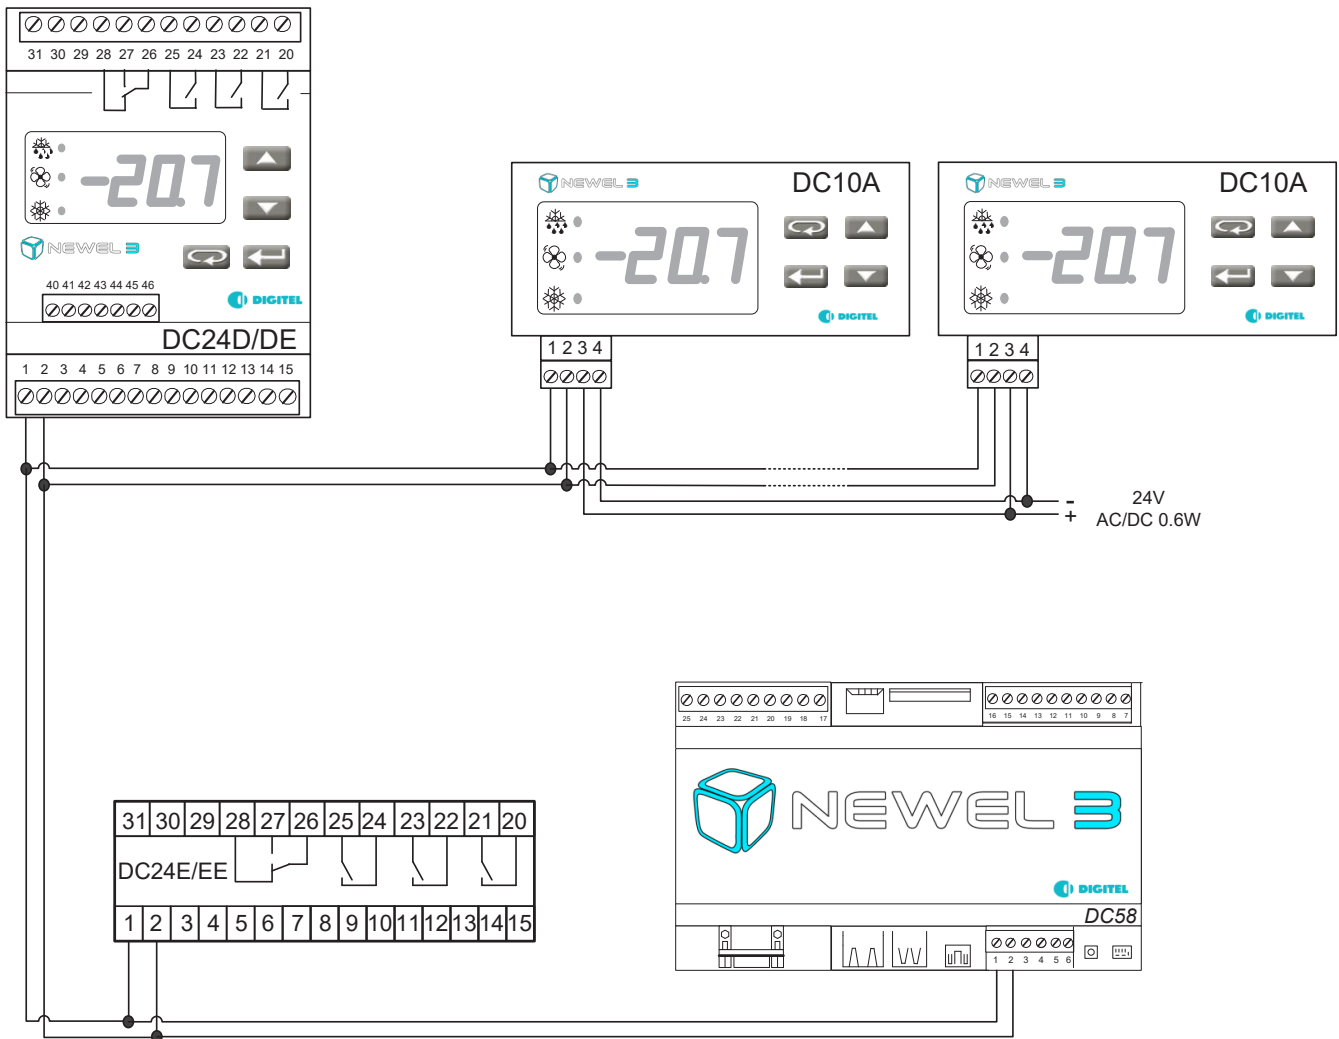

About us

Digitel provides high-end control, monitoring and remote management solutions for installations requiring a high degree of performance: refrigeration, heat recovery, controlled atmosphere chamber, growth chamber or special and customized installations.

Digitel SA
Route de Montheron 12
1053 Cugy, Suisse

P: +41 21 731 07 60
E : info@digitel.swiss

www.digitel.swiss